


Product Name :
Flash and Fire Point Apparatus

Product Code :
CHINAELABC2510004

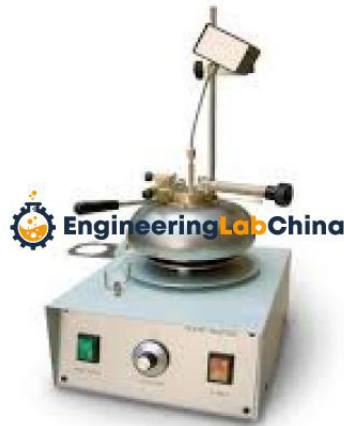

Description :

Flash and Fire Point Apparatus

Technical Specification :

Accessories:

Stirrer Motor, 115/230V 50/60Hz – Slow speed gear motor rotates stirrer of Tester at 105rpm for Procedure A and at 250rpm for Procedure B.

Includes adjustable support bracket and mounting rod.

Installs in base of flash tester.

Thermometer – Range: 20 to 230°F

Thermometer – Range: –5 to +110°C

Thermometer – Range: 200 to 700°F

Thermometer – Range: 90 to 370°C

Cover Assembly – Complete assembly. Includes shutter, flame exposure device, stirrer and thermometer ferrule.

Brass Test Cup – With heat resistant handle.

Nickel Plated Test Cup – With heat resistant handle

